


C620

Cabin camera



1/2.9" CMOS Sensor
 1080P CMOS Sensor
 HDResolution:2MP:
 1920X1080,1MP:1280*720
 AHD 1080P output as default
 0.1 Low illumination
 Aviation cable, DC12V power supply

The C620 camera is mounted on the ceiling of the cab, cargo hold, or bus to capture interior images, ensuring cargo security and providing video evidence as needed.

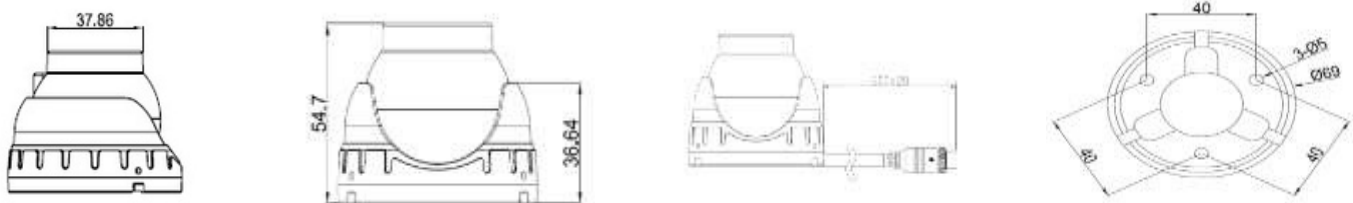

Specifications

Sensor	GC2053, 1/2.9"
DSP	FH8536H
Image Pixel	1280*720,1920*1080
System	PAL/NTSC
Min. Illumination	0.1Lux@F1.2, 0Lux (IR ON)
IR led details	6pcs 850 IR led, distance:5-10M. 1-2Lux open, 4-5Lux close
SNR	≥70dB

Sync. System	Internal Synchronization
Video Output	AHD
Audio	Optional
S/N Ratio	$\geq 70\text{dB}$
Lens	2.8MM
Day&Night	Auto (ICR) /Color/White&Black
Shutter	Auto
White Balance	Automatic tracking
Gamma Correction	0.45
IR LED	6pcs 850 IR LED
Video Output	4pin aviation
Power Supply	DC12V \pm 10%
Power Consumption	140mA(MAX)
Work Temp	-20°C ~ 70°C